RC RODCRAFT®

WORKSHOP EQUIPMENT 2015

www.rodcraft.com

RODCRAFT

QUALITY FOR PROFESSIONALS

One of the world’s leading brands

Since 1974, the Rodcraft brand stands for high-quality products and services. Founded in Germany, Rodcraft has grown steadily to become one of the world's leading brands of pneumatic tools and workshop equipment dedicated to the vehicle service and industrial maintenance applications.

Research and development

Our organisation is constantly investing in research and development, and the Rodcraft product range features many patented designs such as our composite sander and latest impact wrench series.

Market coverage

With a strong European based sales channel, local sales offices, dedicated distributors and national importers are covering over 80 countries worldwide on a daily basis. We are close to our clients and able to provide fast service and support.

Testing and quality inspections

To ensure and guarantee long life performance, many strict testing and quality inspections are conducted through the tool and equipment design, production and assembly stages. All products are thoroughly tested at the Technocenter to pass EC certification according to ISO standards and many of the customer centres marketing the Rodcraft product lines are ISO 9001 and ISO 14001 certified.

Discover the complete Rodcraft range on www.rodcraft.com

- online air tools catalogue
- online workshop equipment catalogue
- Rodcraft accessories
- technical documentation
- service centre contacts
- Rodcraft sales and distributor contacts

Check out today our mobile eCatalog on m.rodcraft.com

A broad range of pneumatic tools and workshop equipment dedicated to the vehicle service and industrial maintenance applications.

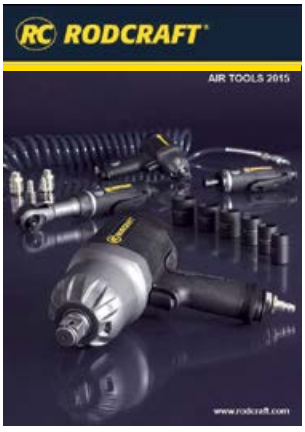

GLOSSARY

	Capacity
	Weight

CONTENT

01| Trolley jacks 6
| Aluminium hydraulic trolley jacks for cars
| Compact trolley jacks
| Hydraulic trolley jacks
| Hydraulic trolley jacks for vans
| Air-hydraulic jacks for trucks & vans
| Balloon jacks
| Telescopic air-hydraulic jacks for trucks & vans
| Bottle jacks
| Jack stands

02| Motor 21
| Workshop cranes
| Motor stands
| Motor repair bridge
| Accessories

03| All around oil 25
| Oil suction units
| Oil collection units
| Drain pans
| Accessories

04| Gear 29
| Transmission jacks
| Accessories

05| Car body 33
| Hydraulic ram sets
| Pneumatic hydraulic pump
| Hydraulic cylinders
| Mobile hydraulic straightener
| Pull clamps
| Accessories

06| Workshop presses 39
| Workshop presses
| Accessories

07| Various 43
| Torque Wrench
| Single wheel dolly
| Hydraulic wheel lift
| Creeper
| Brake fluid tester
| Seats
| Start-booster
| Work light

RH215

01| Trolley Jacks

| Aluminium hydraulic trolley jacks for cars
| Compact trolley jacks
| Hydraulic trolley jacks
| Balloon jacks
| Hydraulic trolley jacks for vans
| Air-hydraulic jacks for trucks & vans
| Balloon jacks
| Telescopic air-hydraulic jacks for trucks & vans
| Bottle jacks
| Jack stands

HYDRAULIC TROLLEY JACKS

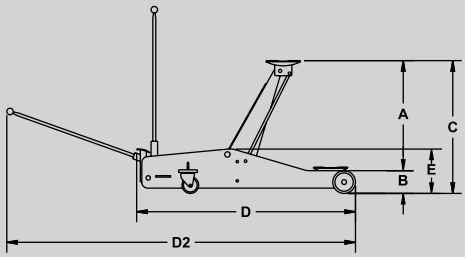

Model **RH135** Part# *8951082025*

Model	RH135
Capacity	1.5 ton(s)
Weight	10.5 kg
Dimensions:	
A	295 mm
B	80 mm
C	375 mm
D	505 mm
D²	1440 mm
E	130 mm
F	235 mm
G	235 mm

Stroke: 75-380 mm | 1.5 t | 10.5 kg

- Very light aluminium jack
- Ideal for break-down service
- Short 2 piece handle bar
- Equipped with carrying handle
- Fast stroke: with 11 pump strokes up to the max. without load
- Saddle plate protection with rubber cover
- Lever with protective sponge to prevent scratches on car bodies

Model **RH201** Part# *8951000003*

RODCRAFT Premium

Model	RH201
Capacity	2 t
Weight	20.5 kg
Dimensions:	
A	375 mm
B	85 mm
C	460 mm
D	695 mm
D²	1820 mm
E	155 mm
F	285 mm
G	320 mm

Stroke: 85-460 mm | 2 t | 20.5 kg

- Very light aluminium jack
- Ideal for break-down service
- Short 2 piece handle bar
- For easy transport the jack is equipped with 3 carrying handles
- Fast stroke with double pump
- Saddle plate protection with rubber cover
- Lever with protective sponge to prevent scratches on car bodies

Model **RH290** Part# *8951082031*

Model	RH290
Capacity	3 t
Weight	41.5 kg
Dimensions:	
A	365 mm
B	145 mm
C	490 mm
D	650 mm
D²	1650 mm
E	160 mm
F	275 mm
G	350 mm

Stroke: 145-510 mm | 3 t | 41.5 kg

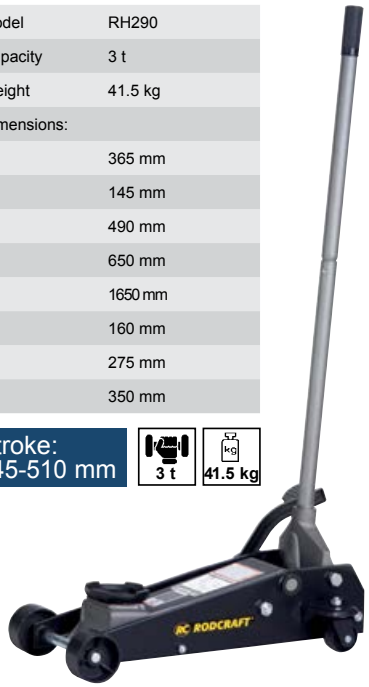

- Small & compact trolley jack
- Pump lever can be disassembled (2 pieces)
- For easy storage and transport
- With foot pedal for fast approach

HYDRAULIC TROLLEY JACKS

Model Part#
RH151 *8951000051*

Model	RH151
Capacity	1 1/2 ton(s)
Weight	50.5 kg
Dimensions:	
A	620 mm
B	80 mm
C	540 mm
D	920 mm
D²	2140 mm
E	153 mm
F	282 mm
G	382 mm

Stroke: 80-540 mm | 1 1/2 t | 50.5 kg

- Hydraulic trolley jack with sturdy steel construction
- Precise hand valve for lowering
- Smooth oil and acid resistant plastic wheels with foot pedal for fast approach
- Pump lever with protector sponge to prevent scratches
- Low profile jack with extra long body to get very deep under a vehicle up to 515 mm at a height of only 80 mm
- Compact when disassembled with 2 piece pump lever for easy transport and storage

Model Part#
RH251 *8951082024*

Model	RH251
Capacity	2 t
Weight	58 kg
Dimensions:	
A	665 mm
B	135 mm
C	800 mm
D	1340 mm
D²	2100 mm
E	190 mm
F	295 mm
G	430 mm

Stroke: 135-800 mm | 2 t | 58 kg

- Hydraulic trolley jack with sturdy steel construction
- Precise hand valve for lowering
- Smooth oil and acid resistant plastic wheels
- With foot pedal for fast approach
- High lifter up to 800 mm max.

Model Part#
RH215 *8951082026*

Model	RH215
Capacity	2 t
Weight	39.4 kg
Dimensions:	
A	430 mm
B	75 mm
C	505 mm
D	750 mm
D²	1960 mm
E	150 mm
F	270 mm
G	375 mm

Stroke: 75-505 mm | 2 t | 39.4 kg

- Hydraulic trolley jack with sturdy steel construction
- Precise hand valve for lowering
- Smooth oil and acid resistant plastic wheels
- With foot pedal for fast approach
- Pump lever with protector sponge to prevent paint scratches
- Low profile and large final height (75-505 mm)
- Fast lifting stroke due to two pump pistons
- Long pedal for fast approach
- Compact when disassembled with 2 piece pump lever for easy transport and storage

HYDRAULIC TROLLEY JACKS

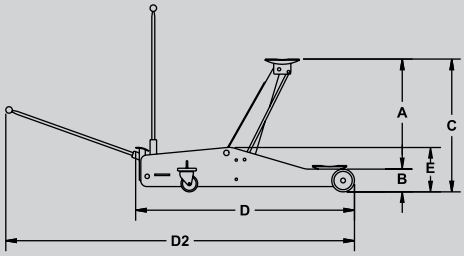

Model Part#
RH315 *8951000063*

Model	RH315
Capacity	3 t
Weight	45 kg
Dimensions:	
A	455 mm
B	95 mm
C	550 mm
D	779 mm
D²	1979 mm
E	160 mm
F	160 mm
G	364 mm

Stroke: 95-550 mm | 3 t | 45 kg

- Hydraulic trolley jack with sturdy steel construction
- Precise hand valve for lowering
- Smooth oil and acid resistant plastic wheels
- Long pedal for fast approach
- Pump lever with protector sponge to prevent paint scratches
- Fast lifting stroke due to two pump pistons
- Compact when disassembled with 2 pieces
- Pump lever for easy transport and storage

Model Part#
RH301 *8951082032*

Model	RH301
Capacity	3 t
Weight	70 kg
Dimensions:	
A	490 mm
B	115 mm
C	605 mm
D	1320 mm
D²	2440 mm
E	190 mm
F	245 mm
G	315 mm

Stroke: 375 mm | 3 t | 70 kg

- Hydraulic trolley jacks with sturdy steel construction for daily workshop use.
- With precise hand valve for lowering
- Equipped with smooth oil and acid resistant plastic wheels
- Long pedal for fast approach and quick lifting of smaller loads
- Pump lever with protector sponge to prevent paint scratches
- Pump lever with T-end for two-handed operation with valve on the lever top
- High lifter up to 800 mm max.

Model Part#
RH501 *8951082050*

Model	RH501
Capacity	5 t
Weight	95 kg
Dimensions:	
A	530 mm
B	150 mm
C	680 mm
D	1420 mm
D²	2560 mm
E	205 mm
F	290 mm
G	360 mm

Stroke: 150-680 mm | 5 t | 95 kg

- Hydraulic trolley jack for truck
- With foot pedal for fast approach
- Hydraulic system with pump lever allows autonomous operation without compressed air
- Easy to position due to foot rest on back (turning on the spot)
- Lever can be locked in 3 angles for storage and positioning deeply under a low vehicle
- Grease nipples on all important joints

Model Part#
RH310 *8951082100*

Model	RH310
Capacity	10 t
Weight	123 kg
Dimensions:	
A	430 mm
B	175 mm
C	605 mm
D	1600 mm
D^2	2550 mm
E	270 mm
F	380 mm
G	410 mm

Stroke: 175-605 mm | 10 t | 123 kg

- Hydraulic trolley jack for trucks
- With foot pedal for fast approach
- Hydraulic system with pump lever allows autonomous operation without compressed air
- With LCS lowering control system for slow descent even when heavily charged
- "Dead man control" auto-stop valve

The all-rounders!

Pump lever with protector sponge to prevent paint scratches
RC RODCRAFT
Foot pedal for fast approach
Grease nipple - easy to access
Rubber protected plate prevents damage and slipping
RC RODCRAFT
Sturdy steel construction for daily workshop use
Smooth oil and acid resistant plastic wheels

Model C225 / RHA
Rubber cover
Ø 137 mm (C 225) for RH290 Part#: *8951011092*

RH215
RH315

BALLOON JACKS



Model Part#
BC2-2S *8951000177*

Model	BC2-2S
Capacity	2 t
Weight	15 kg
Dimensions:	
A - A max	115 - 350 mm
B	265 mm
C	185 mm
D	82 mm
E	98 mm
F	80 mm
G	- mm

Stroke: 235 mm

2 t | 15 kg

- From 115 to 430 mm within extension
- Highly resistant diaphragm and internal telescopic guide
- Overload safety valve
- On/Off ergonomic lever
- 115 mm in uninflated position
- Extension included: 60 mm height

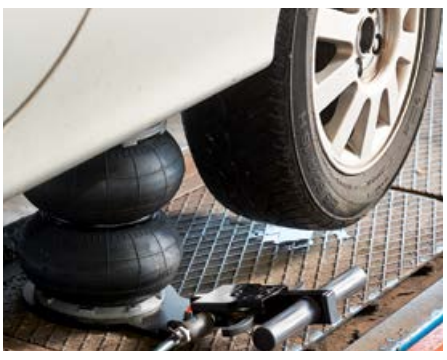

Model Part#
BC2-2L *8951000178*

Model	BC2-2L
Capacity	2 t
Weight	18 kg
Dimensions:	
A - A max	115 - 350 mm
B	265 mm
C	185 mm
D	82 mm
E	98 mm
F	80 mm
G	1000 mm

Stroke: 235 mm

2 t | 18 kg

- From 115 to 430 mm within extension
- Highly resistant diaphragm and internal telescopic guide
- Overload safety valve
- On/Off ergonomic lever
- Adjustable handle and composite wheels
- 115 mm in uninflated position
- Extension included: 80 mm height

Model Part#
BC2-3L *8951000179*

Model	BC2-3L
Capacity	2 t
Weight	19 kg
Dimensions:	
A - A max	200 - 500 mm
B	250 mm
C	185 mm
D	82 mm
E	98 mm
F	60 mm
G	1000 mm

Stroke: 300 mm

2 t | 19 kg

- From 200 to 560 mm within extension
- Highly resistant diaphragm and internal telescopic guide
- Overload safety valve
- On/Off ergonomic lever
- Adjustable handle and composite
- 200 mm in uninflated position
- Extension included: 80 mm height

Accessories for BC2 serie

Model BC2-2S/2L
Ø 80 mm extension Part#: *8950312038*

Model BC2-3L
Ø 60 mm extension Part#: *8950312081*

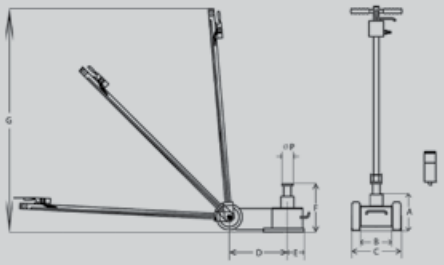

Model Part#
LHH22 *8951084201*
LHH35 *8951084350*

Model	LHH22	LHH35
Capacity	20 t	32 t
Weight	49 kg	54.4 kg
Dimensions:		
A	210 mm	255 mm
B	205 mm	250 mm
C	320 mm	330 mm
D	330 mm	510 mm
D+E	430 mm	610 mm
F	325 mm	368 mm
G	1200 mm	1200 mm
P	50 mm	50 mm

Stroke:
LHH22: 210-435 mm
LHH35: 255-488 mm

- Short and compact, very easy to manoeuvre
- Overload control and safety valve against undesired descent
- Piston is retracted by 4 springs
- Piston includes integrated threaded extension
- Front handle for easier carrying
- Including adapters: broad saddle with diameter 68 mm, height 20 mm. Diameter 48 mm, heights 20/60/100 mm
- Air supply pressure needs to be 7 - 10 bar
- Air consumption 300 l/min.
- According to EN 292

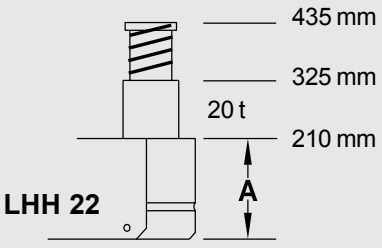

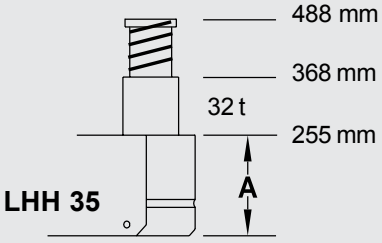

Model Part#
LHHT20P *8951000076*

RODCRAFT Premium

Model	LHHT20P
Capacity	20 t
Weight	28 kg
Dimensions:	
A	166 mm
B	200 mm
C	270 mm
D	370 mm
D+E	470 mm
F	238 / 320 mm
G	964 mm
P	58 mm

Stroke:
166-320 mm

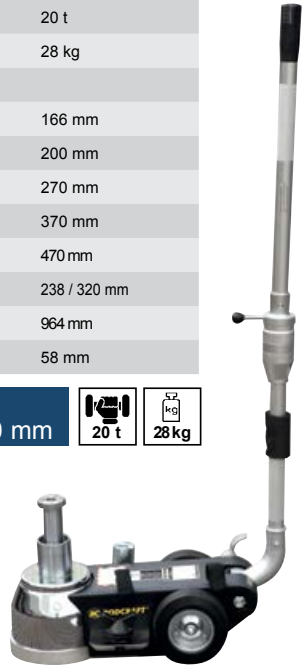

- 28 kg lightweight telescopic air hydraulic jack
- 2 part handle fixed with velcro straps for transport
- Air powered (air-hydraulic pump) and "remote" controlled from the handle with a joy stick
- Long handle bar with control panel at the end on the grip allows pushing the jack far under the suspension
- Handle bar locks in 3 positions controlled by foot pedal
- Air supply pressure needs to be 7-10 bar
- Air consumption 300 l/min
- Incl. 1 Adapter 100 mm height and 1 Adapter for better adaption of axles properly stored for transport on a stand on each side of the jack



AIR-HYDRAULIC JACKS FOR VANS AND TRUCKS



Model Part#
LHHT3 *8951000172*

Model	LHHT3
Capacity	30 / 15 t
Weight	49 kg
Dimensions:	
A	150 mm
B	205 mm
C	290 mm
D	360 mm
D+E	465 mm
F	225/295 mm
G	1355 mm
P	63.5 mm

Stroke: 145 mm



- Handle bar locks in 3 positions
- Large & soft rubber wheels
- Foldable handle
- Carrying handle on the cylinder
- Large base
- Air powered piston
- 3 extensions - stored for transport on stands



Model Part#
LHHT5 *8951000173*

Model	LHHT5
Capacity	50 / 25 / 10 t
Weight	69 kg
Dimensions:	
A	150 mm
B	250 mm
C	315 mm
D	430 mm
D+E	555 mm
F	220/275/360 mm
G	1355 mm
P	91 mm

Stroke: 210 mm



- Handle bar locks in 3 positions
- Large & soft rubber wheels
- Foldable handle
- Carrying handle on the cylinder
- Large base
- Air powered piston
- 3 extensions - stored for transport on stands



Compact portable

Easy to use:
controlled with joy stick

Easy to transport:
Foldable handle

Telescopic hard
chromium plated piston rod

Easy maneuvering:
Long handle bar and control panel at the end of the grip allows the jack to be pushed far under the vehicle

High stability:
large base

LHHT3
LHHT5



Bottle jacks 2t - 50t capacity

certified according to DIN 76024

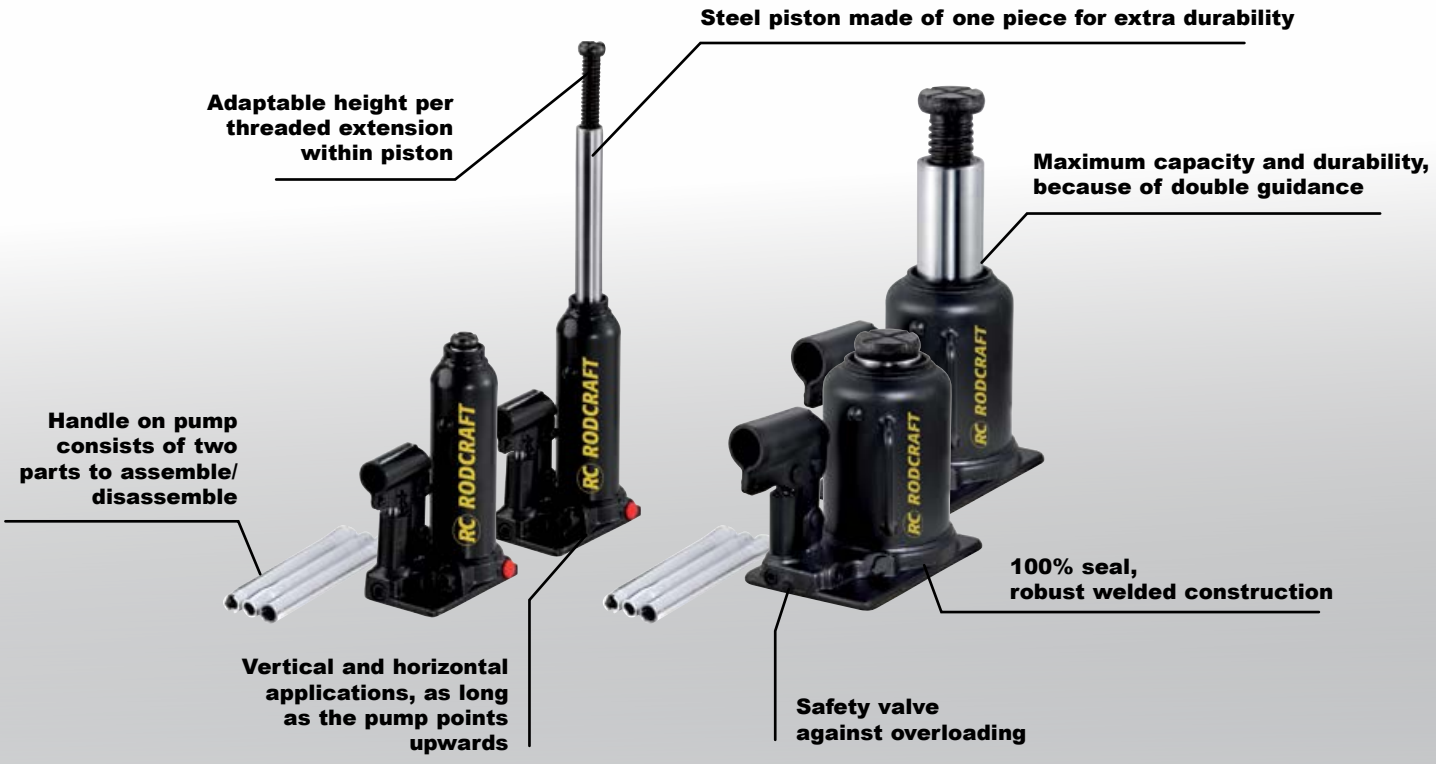
Steel piston made of one piece for extra durability
Adaptable height per threaded extension within piston
Maximum capacity and durability, because of double guidance
Handle on pump consists of two parts to assemble/ disassemble
100% seal, robust welded construction
Vertical and horizontal applications, as long as the pump points upwards
Safety valve against overloading
RC RODCRAFT

- Hydraulic system with mounted manual pump is powerful, compact, versatile
- Maximum capacity and durability, because of double guidance
- 100% seal due to robust welded construction
- High stability, due to large base plate
- Vertical and horizontal applications, as long as the pump points upwards
- Fast and easy adaptable height, per threaded extension within piston
- With safety valve against overloading
- Steel piston made of one piece for extra durability
- Handle on pump consists of two parts to assemble/disassemble

Model	MGN 2	MGN 3	MGN 5	MGN 8	MGN 12	MGN12F	MGN12L	MGN 20	MGN20F	MGN 30	MGN50L
Part#	8951000009	8951000010	8951000011	8951000012	8951000013	8951000127	8951000128	8951000014	8951000129	8951000015	8951000130
Capacity	2 t	3 t	5 t	8 t	12 t	12 t	12 t	20 t	20 t	30 t	50 t
Weight	2.4 kg	2.9 kg	3.8 kg	5.8 kg	6.7 kg	9.5 kg	5.9 kg	9.1 kg	13 kg	18.3 kg	35.3
Dimensions:											
A (min.)	180 mm	190 mm	200 mm	200 mm	180 mm	240 mm	155 mm	185 mm	275 mm	285 mm	300 mm
A+B (max.)	305 mm	325 mm	340 mm	320 mm	275 mm	390 mm	225 mm	280 mm	445 mm	455 mm	480 mm
C (+extension)	55 mm	65 mm	60 mm	80 mm	75 mm	90 mm	45 mm	35 mm	70 mm	-	
D	360 mm	390 mm	400 mm	400 mm	350 mm	480 mm	270 mm	315 mm	515 mm	455 mm	480 mm
E	110 mm	115 mm	130 mm	150 mm	165 mm	144 mm	144 mm	180 mm	140 mm	190 mm	150 mm
F	20 mm	70 mm	75 mm	90 mm	105 mm	43 mm	53 mm	120 mm	53 mm	140 mm	66 mm
G	20 mm	23 mm	29 mm	35 mm	43 mm	43 mm	43 mm	53 mm	53 mm	62 mm	63 mm

Model Part#
MGN12F *8951000127*
MGN12L *8951000128*

Model	MGN12F	MGN12L
Capacity	12 t	12 t
Weight	9.5 kg	5.9 kg
Dimensions:		
A (min.)	240 mm	155 mm
A+B (max.)	390 mm	225 mm
C (extension)	90 mm	45 mm
D	480 mm	270 mm
E	144 mm	144 mm
F	43 mm	53 mm
G	43 mm	43 mm

Height 480 mm & 270 mm

12 t | 9.5 kg | 5.9 kg

FAST AND LOW BOTTLE JACK

Model Part#
MGN20F *8951000129*

Model	MGN20F
Capacity	20 t
Weight	13 kg
Dimensions:	
A (min.)	275 mm
A+B (max.)	445 mm
C (extension)	70 mm
D	515 mm
E	140 mm
F	53 mm
G	53 mm

Height 515 mm

20 t | 13 kg

Model Part#
MGN50L *8951000130*

Model	MGN50L
Capacity	50 t
Weight	35.3 kg
Dimensions:	
A (min.)	300 mm
A+B (max.)	480 mm
D	480 mm
E	150 mm
F	66 mm
G	63 mm

Height 480 mm

50 t | 35.3 kg

Jack stands
1.5t - 16t Capacity
TUV & GS approved

- Welded, sturdy steel tube construction, strutted and easy to carry
- Good standing stability since each foot is equipped with a broad plate
- Massive steel stem with models with threaded spindle, ergonomic steel tube stem for easier carrying on other jack stands with large bolt on chain and safety clamp.
- USBN5.0 finely adjustable with rubber protector on top, especially suited for vans and buses
- All models TUV & CE certified, except USB16H

Delivered in pairs

Model	USB1.5	USB1.5H	USB3	USB5	USBN5	USB8	USB8H	USB12G	USB12HG	USB16H
Part#	8951000096	8951000097	8951000098	8951000099	8951000100	8951000101	8951000102	8951000103	8951000104	8951000106
Capacity	1 1/2 ton(s)	1 1/2 ton(s)	3 t	5 t	5 t	8 t	8 t	12 t	12 t	16 t
Weight	2.2 kg	3.6 kg	3.8 kg	5 kg	4.3 kg	7.9 kg	11.4 kg	10.6 kg	14.4 kg	19.5 kg
min. height	260 mm	430 mm	320 mm	370 mm	245 mm	385 mm	580 mm	345 mm	475 mm	430 mm
max. height	405 mm	700 mm	530 mm	580 mm	350 mm	600 mm	950 mm	515 mm	730 mm	725 mm
Stroke	145 mm	270 mm	145 mm	210 mm	95 mm	215 mm	370 mm	170 mm	255 mm	295 mm
Positions in height	5 steps	5 steps	5 steps	5 steps	Direct	5 steps	6 steps	Direct	Direct	5 steps

Jack stands
2t - 6t Capacity

Ductile iron support column
Safety locking pin
Self locking handle with composite tip
Rugged & welded steel frame construction
RODCRAFT
Feet with extra large plate to resist sinking into the ground

- High stability due to feet with extra large plate
- Self locking handle & locking pin increases safety
- Durable & resistant ductile iron support column & rugged steel frame construction
- Easy to operate : ratchet action for height adjustment.

Delivered in pairs

Model	UBZ-2	UBZ-3	UBZ-6
Part#	8951000027	8951000028	8951000029
Capacity	2 t	3 t	6 t
Weight	2.5 kg	3 kg	5 kg
min. height	280 mm	300 mm	400 mm
max. height	425 mm	455 mm	620 mm
Stroke	182 mm	182 mm	258 mm
Positions	10 steps	11 steps	12 steps

WK102K

02| Motor

| Workshop cranes
| Motor stands
| Motor repair bridge
| Accessories

FOLDABLE CRANES





Model Part#
WK102K *8951080101*

Model	WK102K
Capacity P1	1.000 kg
Capacity P2	750 kg
Capacity P3	500 kg
Capacity P4	250 kg
Weight	77,5 kg
Dimensions:	
A	1.560 mm
E	1.920 mm
G	2.120 mm
J	1.480 mm
K	825 mm
L	935 mm
M	160 mm
P	430 mm
S	440 mm
R min.	960 mm
R med.	1.060 mm
R max.	1.160/1.230 mm

Foldable

1,0 t | 77,5 kg

- Compact because of foldable front wheel legs
- Adjustable lifting arm in 4 positions
- Double effect hydraulic pump can be operated from standing at the side of the crane
- "dead man" auto-stop valve
- Additional small wheels for moving easily when folded up
- Oil and acid resistant wheels, the rear wheels swivel, the front wheels are fixed

Model Part#
WK201KM *8951080200*

Model	WK201KM
Capacity P1	2.000 kg
Capacity P2	1.750 kg
Capacity P3	1.650 kg
Capacity P4	-
Weight	173 kg
Dimensions:	
A	1.720 mm
E	2.340 mm
G	2.500 mm
J	1.900 mm
K	1.035 mm
L	1.160 mm
M	200 mm
P	635 mm
S	570 mm
R min.	1.275 mm
R med.	1.420 mm
R max.	1.570 mm

Foldable

2,0 t | 173 kg

- Auto-stop safety valve
- Compact because of foldable front wheel legs
- 2 fixed wheels at front, 2 swivel oil and acid resistant wheels at rear end
- Arm with 3 extension positions
- Swivel pump and swivel pump lever for operating the pump from the work place
- Lifting of the arm by pumping up and down
- Lowering of the arm by pushing the lever up and backwards - while free hand controls load

Model Part#
MMB500 *8951089048*

Model	MMB500
Capacity	500 kg
Weight	27 kg
Dimensions:	
Length	1200 mm
Width	835 mm
Height	850 mm

500 kg Capacity

- Universal aid improves ergonomics when working on motors due to its comfortable working height and the swivelling fixation plate (360°, can be locked every 60°)
- Centre height of the suspension plate: 910 mm
- The motor suspension arms can be adjusted from a minimum radius of 310 mm up to a maximum radius of 435 mm
- At the end of each suspension arm bolts can be fixed through the pipe shaped end of the arm into the motor (bolt length approx. 60 mm, max. thread M14) - bolts are not included in the delivery

Model Part#
MP500 *8951089050*

Model	MP500
Capacity	500 kg
Dimensions:	
Width	655 mm
Length chain	1030 mm

500 kg Capacity

- For assembly and disassembly of e.g. motors, using a workshop crane
- Chain flange can be attached to the motor
- Chains are hooked on one side into the flanges and on the other into the MP 500 at appropriate length
- By turning the crank the hook-up ring is shifted sideways which tilts the load in order to obtain correct positioning for assembly / disassembly
- Certified chains and hooks according to norm DIN EN 818 part2 available, see accessories

Accessories for MP500 + MGM 1

Model Part#
SIH *8951089073*
safety hook

Model Part#
SIK *8951089072*
safety chain, 1,4m
DIN EN 818T2 1,5 t

Model Part#
MGM2-P *8951000176*

Model	MGM2-P
Capacity	400 kg
Weight	14,8 kg
Dimensions:	
Stroke of spindles	265 mm
Spindle thread	M14
Distance between feet	min. 1100 / max. 1600 mm

500 kg Capacity

- Instantaneous set up on the vehicle even when positioned asymmetrically on the car
- Quick and easy positioning of the motor for trouble-free fitting or removal of the transmission
- Well balanced load because of 2 spindles
- Certified chains and hooks according to norm DIN EN 818 part2 available, see accessories
- Capacity 400 kg
- Delivered with 1 chain with 2 hooks

AK03

NOTE:
Oil should be warm for removal
Due to fast changing car series please always check feasibility of oil removal through dipstick tube with/without adapters prior to operation.

03| All around oil

| Oil suction units
| Oil collection units
| Drain pans
| Accessories

OIL SUCTION UNITS/OIL CELLECTION UNITS

Model Part#
AK03 *8951081000*

Model	AK03
max. capacity	24 l
Dim. max. mm:	375x375x900
Press. for emptying	5-6 bar
Weight empty	14 kg
Air inlet (Euro)	1/4"
max. Vacuum	0,6-0,7 bar
flow rate with nozzle ø 5 mm	0,9 l/min.
flow rate with nozzle ø 6 mm	1,3 l/min.
flow rate with nozzle ø 8 mm	3,4 l/min.
flow rate with rigid nozzle ø 8 mm	4,8 l/min.

Tank cap.: 24 L

14 kg

- Lightweight composite housing (only 14 kg)
- Mobile oil suction tool with 2 wheels
- Works independently without permanent connection to air supply
- Easy emptying of the tank using compressed air (max. 1.4 bar).
- Easy oil removal through dipstick opening with nozzles or with adapter socket
- Incl. flexible nozzles 5, 6 and 8 mm and straight rigid nozzles 6 and 8 mm (800 mm length)
- Direct oil removal with 3 suction adapters (included in delivery) :
  Ø 16.0 mm adapter Mercedes
  Ø 5.4 mm adapter VW Golf
  Ø 12.3 mm adapter BMW

Model Part#
TK05 *8951081013*

Model	TK05
max. capacity	70/80 l
Pan capacity	25 l
Dimens. max. mm:	470x595x1620
Dimens. min. mm:	470x595x1070
Dimens. Pan	ø 460 mm
Press. for emptying	0,5 bar
Weight empty	23 kg

Tank cap.: 80 L

23 kg

- Oil collection unit for cars as well as small trucks
- Tank can easily be emptied using compressed air
- Drain pan adjustable in height
- 2 wheels on axle and 2 swivel wheels with large diameter
- Large drain mesh in the pan, easy to reach
- Drain pan is equipped with its own valve, so the tank can be emptied during an oil service

Accessories for AK03

Model Part#
AK3-SFL5 *8951011048*
Tube, flexible 5 mm

Model Part#
AK3-SFL6 *8951011049*
Tube, flexible 6 mm

Model Part#
AK3-SFL8 *8951011050*
Tube, flexible 8 mm

Model Part#
AK-5/0,9F *8951011032*
Tube, flexible 5 mm

Model Part#
AK-3ADB *8951011044*
Adapter for Mercedes
ø 16,0 mm

Model Part#
AK-5A1 *8951011028*
Adapter for Mercedes / Volkswagen ø 16,0 mm

Model Part#
AK-3ABMW *8951011045*
Adapter for BMW
ø 12,3 mm

Model Part#
AK-3AVW *8951011043*
Adapter for Volkswagen Golf
ø 5,4 mm

DRAIN PANS

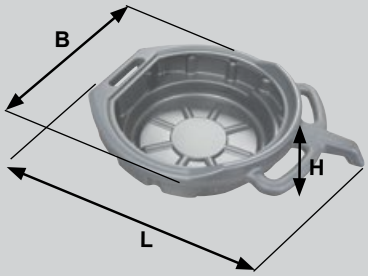

Model Part#
P2 *8951000057*

Model	P2
Capacity	8 l
Weight	0,7 kg
Dimensions:	
L	515 mm
B	390 mm
H	145 mm

Capacity: max. 8 L

0,7 kg

- 3 handles for carrying
- Anti-splash rim
- Made of oil and petrol resistant polyethylene (HDPE)

Model Part#
P46 *8951000058*

Model	P46
Capacity	16 l
Weight	0,95 kg
Dimensions:	
L	570 mm
B	450 mm
H	175 mm

Capacity: max. 16 L

0,95 kg

- 3 handles for carrying
- Anti-splash rim
- Made of oil and petrol resistant polyethylene (HDPE)

Model Part#
P4 *8951081032*

Model	P4
Capacity	17 l
Weight	2 kg
Dimensions:	
L	675 mm
B	380 mm
H	150 mm

Capacity: max. 17 L

1,65 kg

- 3 handles for carrying
- Closed version
- Made of oil and petrol resistant polyethylene (HDPE)

Model Part#
P50 *8951000090*

Model	P50
Capacity	43 l
Weight	4.1
Dimensions:	
L	912 mm
B	495 mm
H	179 mm

Capacity max: 43 L

1,65 kg

- 3 handles for carrying
- Closed model
- Made of oil and petrol resistant polyethylene
- 2 wheels for easy transportation

GHN600

04| Gear

| Transmission jacks
| Accessories

TRANSMISSION JACKS



Model Part#
GHN300 *8951000131*

Model	GHN300
Capacity	300 kg
min. height	1180 mm
max. height	2010 mm
Weight	30.6 kg
A / B	560 / 590 mm
C	75 mm
D	1180 mm
E	2010 mm
F	830 mm
G	460 mm
H	20 mm
Oil volume	760 ml

Capacity 300 kg

300 kg | 30.6 kg

- Chromed cylinder in an oil bath
- Easy to position with round horizontal handle
- Large food pedal for lifting without locking position
- Small foot pedal for lowering
- Automatic descent stop-pedal
- Safety valve against overloading
- Reversible crown to place drain pans
- Incl. 1,2 m length chain to fix load

Model Part#
GHN600 *8951000132*

Model	GHN600
Capacity	600 kg
min. height	1180 mm
max. height	2000 mm
Weight	38 kg
A / B	560 / 590 mm
C	75 mm
D	1180 mm
E	2000 mm
F	820 mm
G	460 mm
H	20 mm
Oil volume	910 ml

Capacity 600 kg

600 kg | 38 kg

- Chromed cylinder in an oil bath
- Easy to position with round horizontal handle
- Large food pedal for lifting without locking position
- Small foot pedal for lowering
- Automatic descent stop-pedal
- Safety valve against overloading
- Reversible crown to place drain pans
- Incl. 1,2 m length chain to fix load

Model Part#
GHN1000 *8951000133*

Model	GHN1000
Capacity	1000 kg
min. height	1180 mm
max. height	2010 mm
Weight	50 kg
A / B	560 / 590 mm
C	75 mm
D	1180 mm
E	2010 mm
F	830 mm
G	455.5 mm
H	20 mm
Oil volume	1320 ml

Capacity 1000 kg

1000 kg | 50 kg

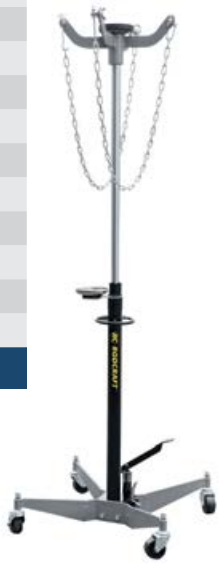

- Chromed cylinder in an oil bath
- Easy to position with round horizontal handle
- Large food pedal for lifting without locking position
- Small foot pedal for lowering
- Automatic descent stop-pedal
- Safety valve against overloading
- Reversible crown to place drain pans
- Incl. 1,2 m length chain to fix load

Transmission Jacks 300-1000 Kg capacity

Anti-rust : chromed cylinder in an oil bath
Convenient & complete: Provided with a 1.2m length chain, a reversible claw with rubber pad and a magnetic tray
Round horizontal handle
Hands-free operation : Large foot pedal for lifting without locking position and a small foot pedal for lowering
High stability: Large & low clearance base

GHN300
600-1000

HRS04

05| Car Body

| Hydraulic ram sets
| Pneumatic hydraulic pump
| Hydraulic cylinders
| Mobile hydraulic straightener
| Pull clamps
| Accessories

HYDRAULIC RAM SETS

Model Part#
HRS04 *8951000124*

Model	HRS04
Stroke cylinder	120 mm
ø Cylinder	40 mm
ø Cylinder	44 mm
ø Piston	25 mm
min. Length	268 mm
max. Length	388 mm
Oil volume Pump	0,4 l
Oil volume Cylinder	0,4 l
max. Pressure	700 bar

4 ton capacity

- Hydraulic ram sets
- Application: pushing - widening - clamping HRS04 with 4t
- Easy assembly because of unthreaded connections
- 17 piece set in a plastic case for easy storage
- Each piece with its own moulded compartment to keep the set complete NO LOOSE STYROFOAM MOULDS
- Includes full set of accessories

Model Part#
HRS10 *8951000125*

Model	HRS10
Stroke cylinder	130 mm
ø Cylinder	56,5 mm
ø Cylinder	63 mm
ø Piston	40 mm
min. Length	320 mm
max. Length	450 mm
Oil volume Pump	0,5 l
Oil volume Cylinder	0,5 l
max. Pressure	700 bar

10 ton capacity

- Hydraulic ram sets
- Application: pushing - widening - clamping HRS10 with 10t
- Easy assembly because of unthreaded connections
- 17 piece set in a plastic case for easy storage
- Each piece with its own moulded compartment to keep the set complete NO LOOSE STYROFOAM MOULDS
- Includes full set of accessories

HRS04 and HRS10 set

Accessories for HRS04/HRS10

Pump
for Part#
HRS04 *8950321713*
HRS10 *8950321748*

Hose 1.500 mm
for Part#
HRS04
HRS10 *8951011979*

Push ram 10 t
for Part#
HRS04 *8950321714*
HRS10 *8950321749*

Spreader 0,5 t
for Part#
HRS04
HRS10 *8950321715*

Model Part#
Extension kit HRS04 *8950390020*
Extension kit HRS10 *8950390035*

400 mm

350 mm

250 mm

100 mm

Tool box
for Part#
HRS04 *8950390006*
HRS10 *8950390022*

Model Part#
Connector kit HRS04 *8950390021*
Connector kit HRS10 *8950390036*

Protection piece for piston

Plate

Prisma piece

Wedge piece, sharp

Push for piston

Push for cylinder

Rubber

Model Part#
HRS20 *8951000126*

Model	HRS20
Stroke cylinder	130 mm
ø Cylinder	90 mm
ø Piston	60 mm
min. Length	280 mm
max. Length	410 mm
Oil volume Pump	0,9 l
Oil volume Cylinder	0,9 l
max. Pressure	700 bar

20 ton capacity

- Hydraulic ram set 20t , 20 pcs.
- Application: pushing - clamping
- All accessories in steel with threaded connections
- 2-step hand pump for 700 bar working pressure
- Stored in 2 durable metal boxes
- Including full set of accessories
- 130 mm stroke of hydraulic cylinder
- Hose length 1500 mm (pump/cylinder)

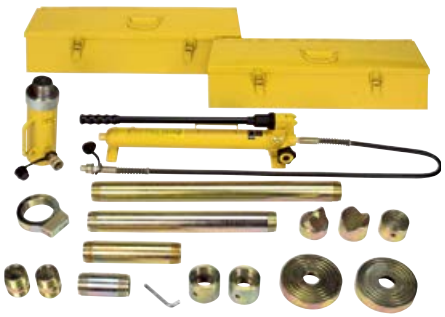

Accessories for HRS20

Pump, hydraulic 2-step
Part#
8950321755

Hose
Part#
8951011979



Model Part#
Connector kit HRS20 *8950390050*

Lock pin

Connector male thread

Connector female thread

Plunger base

Extension

Toe lift

Wedge head

Saddle

Model Part#
Extension kit HRS20 *8950390049*

700 mm

500 mm

250 mm

125 mm

Accessories for HRS04/HRS10/HRS20

Model Part#
PHP10 *8951000136*



Pneumatic-hydraulic Pump.
Adaptable with cylinders of HRS04 / HRS10 / HRS20

Description see page 36

PNEUMATIC-HYDRAULIC PUMP
HYDRAULIC CYLINDER / PULL CLAMPS

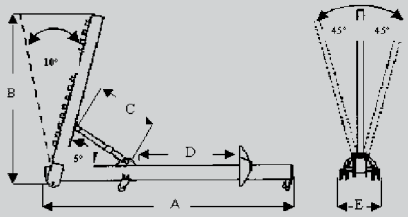

Model Part#
RGS100 *8951089054*

Model	RGS100
Dimensions:	
A	2.900 mm
B	1.600 mm
C	600-700 mm
D	0-1.900 mm
E	720 mm
Gradient	2 x 45⁰
Weight	230 kg

Capacity 10 t

10,0 t | 230 kg

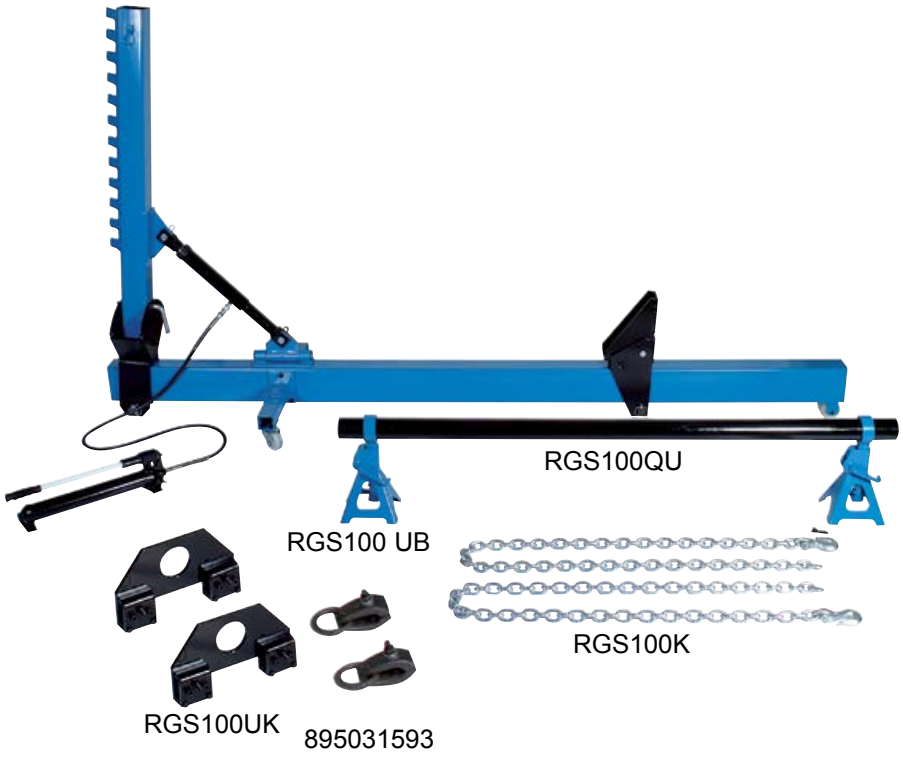

- Easy to move with oil and acid resistant plastic wheels
- Strong 8" 10 t hydraulic ram
- Pull arm can be tilted sideways 45°
- Precise control of pump serves smaller or even delicate straightening applications
- PHP10 is an ideal supplement for this tool that will save time and reduce the manual effort
- **Delivery includes:**
  1x manual pump with high pressure hose (length 1.50 m)
  2x chains, length of 1.50 m (model RGS100K-8951011083)
  with hook (model RGS100H-8951011082)
  2x jack stands, adjustable in height (model RGS100UB - 8951011080)
  2x body clamps*, long type - hole diameter 75 mm (model RGS100UK - 8951011084)
  1x supporting pipe length 1,80 m, diameter 74 mm (model RGS100QU - 8951011081)
  2x universal pull clamps with ring (895031593)
  1x counter support, complete (shark's fin)

Model Part#
PHP10 *8951000136*

Pneumatic-hydraulic Pump. Convenient and easy to handle, operation by hand or foot. 1-step silenced pump with high performance. Ideal in combination with rams like HRS04/ HRS 10/HPP10 and dozer RGS 100. Maximum hydraulic pressure 700 bar. Oil capacity 0.7 l, hydraulic high pressure hose length 1,5 m

Model Part#
HRZ *8951000137*

Pulling ram
Pullling force 5 t. Stroke 156 mm. Thread on cylinder 1/4". Length maximum 665 mm (including hook)

Model Part#
HRD10F *8951000138*

Push ram
Pushing force 4 t / 10 t. Stroke 10 mm. Min. height 42 mm. Length min. 83 mm. Width 58 mm. Thread on cylinder ¼". Adaptable with pumps PHP10 / 10 01 / 111 01 / 110 01

Model Part#
HRD10K *8951000139*

Push ram
Pushing force 10 t. Hydraulic stroke 50 mm. Length minimum 130 mm. Thread on cylinder 1/4".Adaptable with pumps PHP10 / 10 01 / 111 01 / 110 01

Model **101** Part# *8951011064*

Model	101
Total length	225 mm
Total width	85 mm
Total height	70 mm
Height of grip	22 mm
Width of grip	40 mm
Bolt/nut	M16x70
Weight	1,8 kg

One pulling direction

Model **102NN** Part# *8951011068*

Model	102NN
Total length	240 mm
Total width	155 mm
Total height	40 mm
Height of grip	15 mm
Width of grip	35 mm
Bolt/nut	M14x110
Weight	2,1 kg

Two pulling directions

Model **601N** Part# *8951011073*

Model	601N
Total length	180 mm
Total width	120 mm
Total height	150 mm
Height of grip	15 mm
Width of grip	120 mm
Bolt/nut	M14x68
Weight	2,7 kg

Two pulling directions



Model **101N** Part#. *8951011066*

Model	101N
Total length	220 mm
Total width	120 mm
Total height	45 mm
Height of grip	25 mm
Width of grip	43 mm
Bolt/nut	M16x70
Weight	1,8 kg

Two pulling directions

Model **301** Part#. *8951011069*

Model	301
Total length	260 mm
Total width	65 mm
Total height	80 mm
Height of grip	25 mm
Width of grip	30 mm
Bolt/nut	M14x68
Weight	1,6 kg

Quick chain hook

Model **901** Part# *8951011071*

Model	901
Total length	200 mm
Total width	65 mm
Total height	65 mm
Height of grip	-
Width of grip	-
Bolt/nut	-
Weight	1,3 kg

Chain shortener

Model **102** Part#. *8951011065*

Model	102
Total length	240 mm
Total width	125 mm
Total height	45 mm
Height of grip	15 mm
Width of grip	35 mm
Bolt/nut	M14x120
Weight	2,0 kg

One pulling direction

Model **402** Part#. *8951011070*

Model	402
Total length	180 mm
Total width	180 mm
Total height	45 mm
Height of grip	15 mm
Width of grip	45 mm
Bolt/nut	-
Weight	2,4 kg

One pulling direction

Model **102N** Part#. *8951011067*

Model	102N
Total length	230 mm
Total width	90 mm
Total height	35 mm
Height of grip	15 mm
Width of grip	35 mm
Bolt/nut	M14x110
Weight	2,0 kg

One pulling direction

Model **601** Part#. *8951011072*

Model	601
Total length	180 mm
Total width	120 mm
Total height	70 mm
Height of grip	15 mm
Width of grip	120 mm
Bolt/nut	M14x68
Weight	2,3 kg

One pulling direction

WP30P

06| Workshop presses

| Workshop presses
| Accessories

WORKSHOP PRESSES



Model Part#
WP15 *8951000064*

RODCRAFT Premium

Model	WP15
Capacity	15 t
Max. Width A	700 mm
max. Length B	540 mm
max. Height C	882 mm
Width inside frame E	500 mm
Distance inside frame F	120 mm
Distance over table F 1 min.	157 mm
Distance over table F 2 max.	457 mm
Hydraulic stroke R	160 mm
Oil volume	0.6 l
Weight	75.5 kg

2 stage hydraulic

15 t | 75.5 kg

- Professional workshop press with welded frame
- Manual hydraulic pump with ergonomic handle
- 2-speed pump that can be manually switched
- Easy-to-read large gauge
- For pressing on smaller diameters (like bushings and bearings) we offer a press bolt set from our accessory range that fits this press and and contains various press bolts, a quick chuck and a punch plate

Model Part#
WP20S *8951000065*

RODCRAFT Premium

Model	WP20S
Capacity	20 t
Max. Width A	740 mm
Max. Length B	700 mm
Max. Height C	1772 mm
Width inside frame E	510 mm
Distance inside frame F	132 mm
Distance over table F 1 min.	185 mm
Distance over table F 2 max.	1175 mm
Hydraulic stroke R	186 mm
Oil volume	0.95 l
Weight	105 kg

2 stage hydraulic

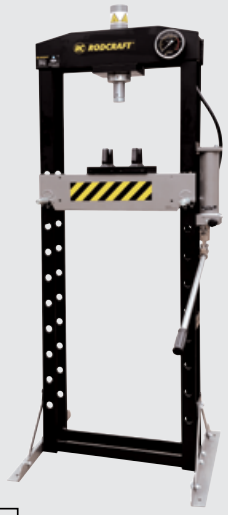

20 t | 105 kg

- Workshop press for applications that can be done while standing
- Especially useful for larger work pieces
- Robust, welded frame
- Automatic 2-speed hydraulic pump with sturdy lever in ergonomic position for powerful pressing
- For pressing on smaller diameters (like bushings and bearings) we offer a press bolt set from our accessory range that fits this press and contains various press bolts, a quick chuck and a punch plate

Model Part#
WP30P *8951000071*

RODCRAFT Premium

Model	WP30P
Capacity	30 t
max. Width A	795 mm
max. Length B	700 mm
max. Height C	1772 mm
Width inside frame E	535 mm
Distance inside frame F	140 mm
Distance over table F 1 min.	151 mm
Distance over table F 2 max.	1031 mm
Hydraulic stroke R	160 mm
Oil volume	1.1 l
Weight	167 kg

Foot pump

30 t | 167 kg

- Workshop press with extra wide robust, welded frame
- For one person operation
- Cylinder can be shifted sideways for versatile applications
- 2-speed pump that can be switched manually - for fast approach and powerful pressing
- Includes a set of press bolts with quick change chuck (see DS8)
- Adjust the press table easily with the help of the suspending cables and the central winch

Model Part#
WP50P *8951000072*

RODCRAFT Premium

Model	WP50P
Capacity	50 t
max. Width A	1030 mm
max. Length B	800 mm
max. Height C	1830 mm
Width inside frame E	730 mm
Distance inside frame F	207 mm
Distance over table F 1 min.	68 mm
Distance over table F 2 max.	1048 mm
Hydraulic stroke R	200 mm
Oil volume	2.5 l
Weight	298 kg

Foot pump

50 t | 298 kg

- Workshop press with extra wide robust, welded frame
- For one person operation
- Cylinder can be shifted sideways for versatile applications
- 2-speed pump that can be switched manually - for fast approach and powerful pressing
- Includes a set of press bolts with quick change chuck (see DS8)
- Adjust the press table easily with the help of the suspending cables and the central winch

Comfortable 30 t or 50 t presses

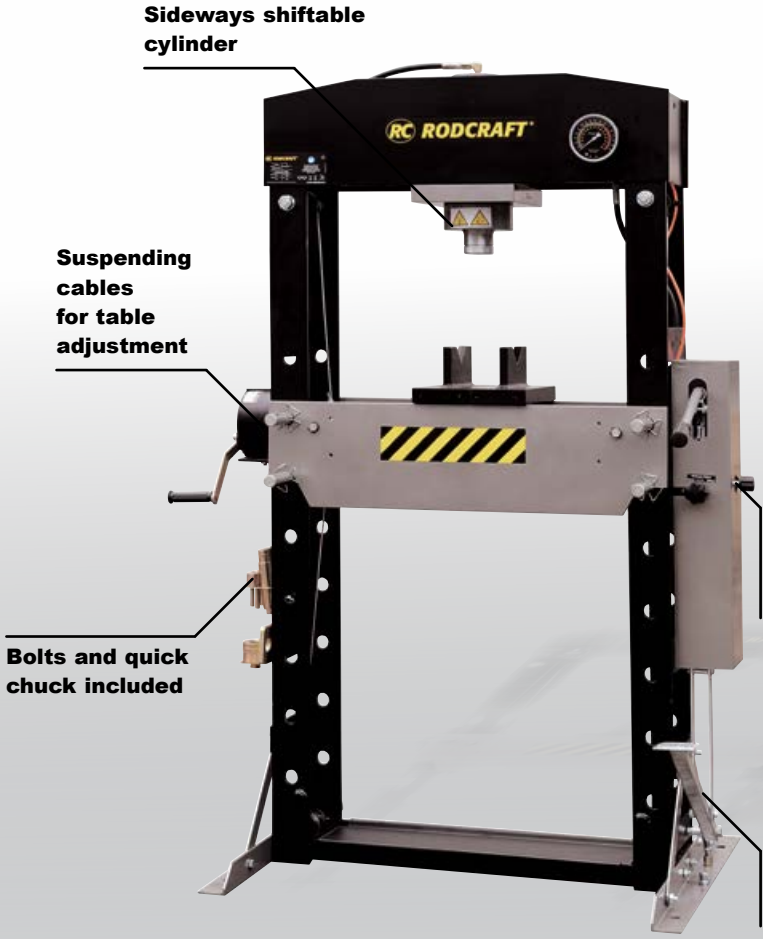
Sideways shiftable cylinder
Suspending cables for table adjustment
Bolts and quick chuck included
2 speeds: fast approach and slow powerful pressing
Foot pedal - both hands free to hold work piece
RODCRAFT

Accessories

Model Part#
DS8 *8955000050*

- Press bolt set with punch plate and quick chuck
- Fits the pistons of all presses shown here
- The quick chuck allows the fast exchange of press bolts to adapt the diameter of the press bolt to various applications
- Already included with models WP30P and WP50P

Model Part#
Punch plate *8955000049*

Model Part#
Quick change *8955000039*

Model	Part#
Punch 10 mm	*8955000048*
Punch 12 mm	*8955000047*
Punch 16 mm	*8955000042*
Punch 18 mm	*8955000041*
Punch 20 mm	*8955000043*
Punch 22 mm	*8955000044*
Punch 25 mm	*8955000045*
Punch 30 mm	*8955000046*

RSF01

RG600

07| Various

| Torque Wrench
| Single wheel dolly
| Hydraulic wheel lift
| Creeper
| Seats
| Brake fluid tester
| Start-booster
| Work light

TORQUE WRENCH

Model **DMS030** Part# *8951000091*

Model	DMS030
Square Drive	1/4"
Capacity	5 – 25 N.m
Graduation	0,1 N.m
Length	245 mm
Weight	1.28 kg

1/4" - 5 – 25 N.m

- Scale in Nm
- Torque adjustment with manual locking in front of the handle
- Fine scale graduation: 0.1 Nm
- Sensitive & sound signals when reaches the torque
- Provided with ISO 6789 calibration certificate
- Provided in a protective blow molded case
- Numbered wrenches

Model **DMS060** Part# *8951000092*

Model	DMS060
Square Drive	3/8"
Capacity	20 – 100 N.m
Graduation	0,5 N.m
Length	410 mm
Weight	1.5 kg

3/8" - 20 – 100 N.m

- Scale in Nm
- Torque adjustment with manual locking in front of the handle
- Fine scale graduation: 0.5 Nm
- Sensitive & sound signals when reaches the torque
- Provided with ISO 6789 calibration certificate
- Provided in a protective blow molded case
- Numbered wrenches

Model **DMS200** Part# *8951000093*

Model	DMS200
Square Drive	1/2"
Capacity	40 – 200 N.m
Graduation	1 N.m
Length	520 mm
Weight	2.02 kg

1/2" - 40 – 200 N.m

- Scale in Nm
- Torque adjustment with manual locking in front of the handle
- Fine scale graduation: 1 Nm
- Sensitive & sound signals when reaches the torque
- Provided with ISO 6789 calibration certificate
- Provided in a protective blow molded case
- Numbered wrenches

Model Part#
DMS400 *8951000094*

Model	DMS400
Square Drive	3/4"
Capacity	150 – 750 N.m
Graduation	5 N.m
Length	1060 mm
Weight	5,84 kg

3/4" - 150 – 750 N.m

- Scale in Nm
- Torque adjustment with manual locking in front of the handle
- Fine scale graduation: 5 Nm
- Sensitive & sound signals when reaches the torque
- Provided with ISO 6789 calibration certificate
- Provided in a protective blow molded case
- Numbered wrenches

Model Part#
DMS1000 *8951000095*

Model	DMS1000
Square Drive	1"
Capacity	200 – 1000 N.m
Graduation	5 N.m
Length	1255 mm
Weight	6,84 kg

1" - 200 – 1000 N.m

- Scale in Nm
- Torque adjustment with manual locking in front of the handle
- Fine scale graduation: 5 Nm
- Sensitive & sound signals when reaches the torque
- Provided with ISO 6789 calibration certificate
- Provided in a protective blow molded case
- Numbered wrenches

DMS030 - 1/4"

DMS060 - 3/8"

DMS200 - 1/2"

DMS400 - 3/4"



DMS1000 - 1"

WHEEL DOLLY/ WHEEL LIFT/CREEPER

Model **RHW1** Part# *8951089091*

Adjustable 29-62 cm

250 kg | 18 kg

- Assembly aid for various types of wheels
- Adjustable arms for various wheel sizes (width 29 – 62 cm)
- Equipped with rollers for easy positioning of wheels onto the vehicle's stud bolts or holes in the brake disk
- With stop rollers on the rear side that avoid pushing the wheel onto the frame
- Ergonomic handle with rounded and soft grip
- Handle length adjustable (3 positions)
- Max. capacity 250 kg

Model **RG600** Part# *8951089045*

Max. width 300 mm

600 kg | 18 kg

- Easy positioning of cars - moving in all directions
- Simple to use with foot pedal
- The wheel is lowered when turning the valve
- Knob - robust hydraulic system instead of high maintenance mechanical mechanism (no regreasing of gears etc.)
- For tyres up to a width of 300 mm and a diameter of 650 mm
- Weight 18 kg
- Capacity 600 kg

Model **RSF01** Part# *8951089021*

Model	RSF01
Sitting height	480 mm
min. height	150 mm
Length	1.250 mm
Width	450 mm
Weight	14 kg

Ergonomic sitting height

90 kg | 14 kg

- Creeper - chair in one, for various working heights
- Ergonomic design especially for tiring work
- Folding mechanism with safety lock against unintended folding
- Easy and stable to move on seven large
- Wheels diameter 63 mm oil and acid resistant
- Comfortably upholstered and covered with easy to clean surfaces
- Head rest adjustable in 3 positions
- Storage area for tools, sockets, light (upholstery at feet can be folded up)
- Capacity 90 kg

Model **RSF02** Part# *8951089020*

Model	RSF02
Min. height	115 mm
Length	1.005 mm
Width	480 mm
Weight	4,8 kg

Weight 4,8 kg only

90 kg 4,8 kg

- Solid creeper construction made of plastic
- Extra low area at arms for more freedom
- Upholstered head rest
- Two easy to reach storage areas for parts and tools
- 6 large oil resistant wheels for noise and vibration reduced moving
- Capacity 90 kg

Model **BFT02** Part# *8951089032*

Model	BFT02
Length	130 mm
Width	20 mm
Weight	20 g

Brake Fluid Tester



- Easy to operation: 3 modes according to the water % in the brake fluid.
- Supplied with 1 battery

Model **LED30** Part# *8951000120*

2250 Lux 30 LED's

- Rechargeable work light equipped with
- 30 LED`s and 2250 Lux
- 3 different lights: half light, full light, flash light
- Waterproof: IP65 grade
- Li-Ion Akku is charged within 3,5 hours. 6,0 hours of working time.
- Magnetic based housing is 120° adjustable.
- Provided with car plug (12V) and EU plug (AC100-240 V 50/60HZ)

Model **BOS12-XA** Part# *8951000062*

Model	BOS12-XA
Voltage	12 V
Starting current (amps peak)	3.500 A.p.
Starting current (amps continuous)	1.150 A
Weight	10,2 kg
Recharging capacity	1,5 AH (12V)
Recharging voltage (net to charger)	230 V
Recharging voltage (charger to booster)	14,9 V
Recharging time	15 h
Cycles	500
Cable cross section	28 mm²
Cable length	170 cm
Protection against over-tension	yes
Booster batteries	12V 23 Ah
Recharging cable	yes
Shock-proof housing ABS	yes
Dimension booster WxDxH	380x190x335 mm

Made in Europa 12V / 3500 A.p.

BOS12-XA

10.2 kg

- Mobile and handy aid for start-ups and as a portable source of energy
- Modern 100% gas-proof-sealed battery cells (AGM) with high energy density and 1st-class manufacturing (european quality product) with long life-time
- 170 cm highly flexible long cables
- Solid copper clamps - externally fully insulated - internally connected jaws (conductive band) for large conduction surfaces
- Shock-proof, easy maintenance ABS-housing with practical storage for the cables
- Including an automatic charger (no surcharging, booster can be kept recharging until needed) and equipped with a cable for use in a car's cigarette-lighter socket
- With 5 LED-indicator showing the charging state
- Protects against voltage peaks and preserves memorised data in car computers and radios etc.
- Also reliable under extreme temperature conditions (-40°C up to +45°C)

Model **BOS1224-XA** Part# *8951000061*

Model	BOS1224-XA
Voltage	12 / 24 V
Starting current (amps peak)	7000 A.p. (12V) 3500 A.p (24V)
Starting current (amps continuous)	2300 A (12V) 1150 A (24V)
Weight	21 kg
Recharging capacity	1,5 AH (12V)
Recharging voltage (net to charger)	230 V
Recharging voltage (charger to booster)	14,9 V
Recharging time	15 h
Cycles	500
Cable cross section	50 mm²
Cable length	170 cm
Protection against over-tension	yes
Booster batteries	12 / 24 V 23 Ah
Recharging cable	yes
Shock-proof housing ABS	yes
Dimension booster WxDxH	380x300x335 mm

Made in Europa 12-24V / 3500 - 7000 A

Buzzer with LED if polarity reversal or cross connection
170 cm highly flexible long cables
5 LED-indicator showing the charging state
Shock-proof, easy maintenance ABS housing with practical storage for the cables
Solid copper clamps externally fully insulated and internally connected jaws (conductive band) for large conduction surfaces
12 / 24V
RC RODCRAFT
RODCRAFT

BOS1224-XA

21 kg

- Mobile and handy aid for start-ups and as a portable source of energy
- Modern 100% gas-proof-sealed battery cells (AGM) with high energy density and1st-class manufacturing (european quality product) with long life-time
- Including an automatic charger (no surcharging, booster can be kept recharging until needed) and equipped with a cable for use in a car's cigarette-lighter socket
- Protects against voltage peaks and preserves memorised data in car computers and radios etc.
- Also reliable under extreme temperature conditions (-40°C up to +45°C)
- Supplied with a spare fuse

MODEL	PART#	PAGE
AK03	*8951081000*	26
BC2-2L	*8951000178*	12
BC2-2S	*8951000177*	12
BC2-3L	*8951000179*	12
BFT02	*8951089032*	47
BOS1224-XA	*8951000061*	48
BOS12-XA	*8951000062*	48
DMS030	*8951000091*	44
DMS060	*8951000092*	44
DMS1000	*8951000095*	45
DMS200	*8951000093*	44
DMS400	*8951000094*	45
GHN1000	*8951000133*	30
GHN300	*8951000131*	30
GHN600	*8951000132*	30
HPP10	*8951089082*	34
HRD10F	*8951000138*	36
HRD10K	*8951000139*	36
HRS04	*8951000124*	34
HRS10	*8951000125*	34
HRS20	*8951000126*	35
HRZ	*8951000137*	36
LED30	*8951000120*	47
LHH22	*8951084201*	13
LHH35	*8951084350*	13
LHHT20P	*8951000076*	13
LHHT3	*8951000172*	14
LHHT5	*8951000173*	14
MGM2	*8951000176*	23
MGN2	*8951000009*	16
MGN3	*8951000010*	16
MGN5	*8951000011*	16
MGN8	*8951000012*	16
MGN12	*8951000013*	16
MGN12F	*8951000127*	17
MGN12L	*8951000128*	17
MGN20	*8951000014*	16
MGN20F	*8951000129*	17
MGN30	*8951000015*	16
MGN50L	*8951000130*	17
MMB500	*8951089048*	23
MP500	*8951089050*	23
P2	*8951000057*	27
P4	*8951081032*	27
P46	*8951000058*	27
P50	*8951000090*	27
PHP10	*8951000136*	36
RG600	*8951089045*	46
RGS100	*8951089054*	36
RH135	*8951082025*	8
RH151	*8951000051*	9
RH201	*8951000003*	8
RH215	*8951082026*	9

MODEL	PART#	PAGE
RH251	*8951082024*	9
RH290	*8951082031*	8
RH301	*8951082032*	10
RH310	*8951082100*	11
RH315	*8951000063*	10
RH501	*8951082050*	10
RHW1	*8951089091*	46
RSF01	*8951089021*	46
RSF02	*8951089020*	47
TK05	*8951081013*	26
UBS12HG	*8951000104*	18
UBZ-2	*8951000027*	19
UBZ-3	*8951000028*	19
UBZ-6	*8951000029*	19
USB1.5	*8951000096*	18
USB1.5H	*8951000097*	18
USB12G	*8951000103*	18
USB16H	*8951000106*	18
USB3	*8951000098*	18
USB5	*8951000099*	18
USB8	*8951000101*	18
USB8H	*8951000102*	18
USBN5	*8951000100*	18
WK102K	*8951080101*	22
WK201KM	*8951080200*	22
WP15	*8951000064*	40
WP20S	*8951000065*	40
WP30P	*8951000071*	40
WP50P	*8951000072*	41

Visit www.rodcraft.com for more product information or contact your local distributor:

© Copyright 2015 - Fev. 2015 - 6159942621 - English